




OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

FRAME NO :
D280SC

POLES	HP	KW	SYNCH RPM
4	125	90	1500
6	75	55	1000
8	60	45	750

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

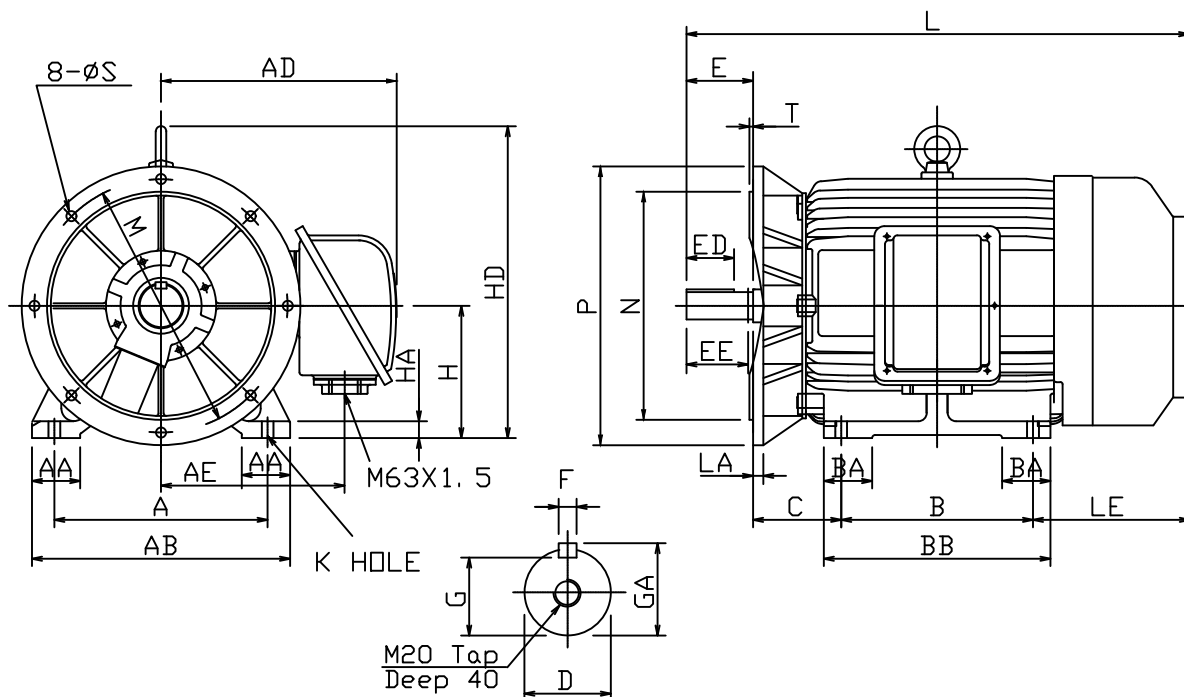

DIMENSIONS IN MM

FRAME NO.		A	AA	AB	AD	AE	B	BA	BB	C	D	E
280SC		457	110	560	610	405	368	110	445	190	80	170
ED	EE	F	G	GA	H	HA	HD	K	L	LA	LE	M
140	157	22	71	85	280	36	710	24	1072	22	344	500
N	P	S	T	NOTES:								
450	550	18. 5	5									

NOTES:

1. FOOT&FLANGE MOUNTED IM2001.
2. TYPICAL DIMENSIONS ONLY
FOR CERTIFIED DIMENSIONS
REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAXe3MINING AND
MAXe3PREMIUM SEVERE DUTY

DWN.	EJ	01. 12. 15
CHKD.	DK	01. 12. 15
APPD.	JF	01. 12. 15

東元電機股份有限公司
TECO ELEC. & MACH. CO., LTD.
TAIWAN R. O. C.

REV : 00