




OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :
D315SC

POLES	HP	KW	SYNCH RPM
4	175	132	1500
6	125	90	1000
8	100	75	750

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

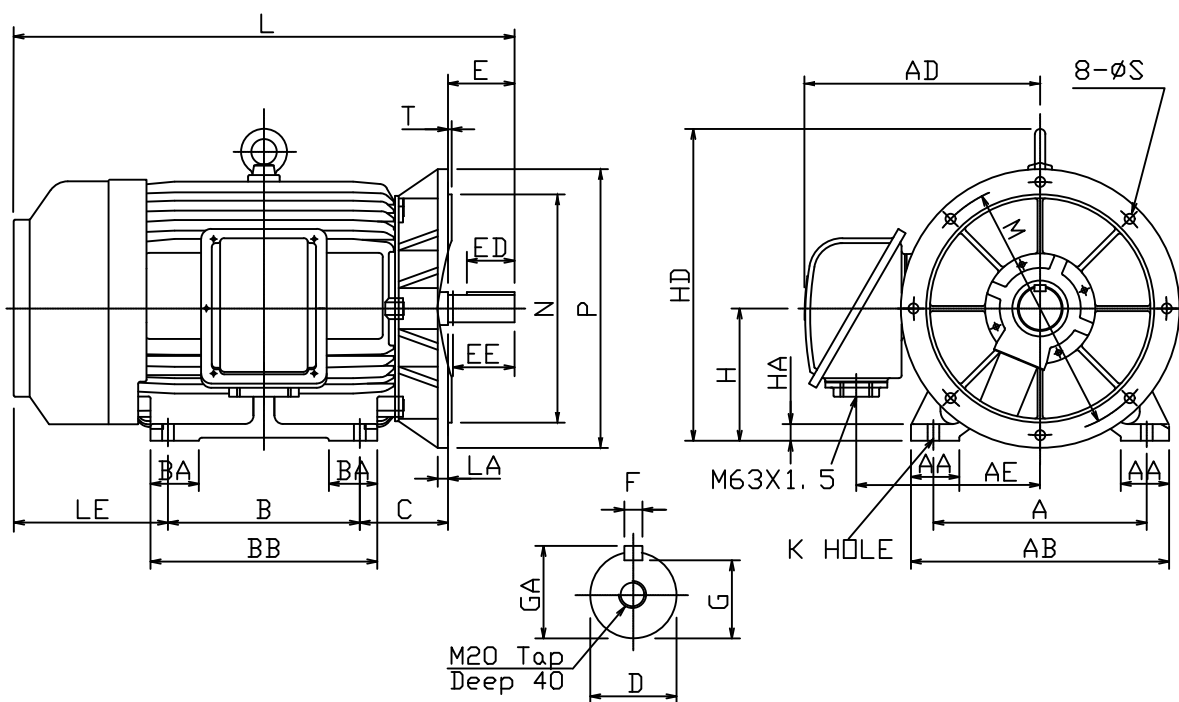

DIMENSIONS IN MM

FRAME NO.		A	AA	AB	AD	AE	B	BA	BB	C	D	E
315SC		508	115	615	610	430	406	115	490	216	85	170
ED	EE	F	G	GA	H	HA	HD	K	L	LA	LE	M
140	157	22	76	90	315	40	743	28	1161	25	369	600
N	P	S	T	NOTES:								
550	660	24	6									

NOTES:

1. FOOT&FLANGE MOUNTED IM2001.
2. TYPICAL DIMENSIONS ONLY
FOR CERTIFIED DIMENSIONS
REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAXe3MINING AND
MAXe3PREMIUM SEVERE DUTY

DWN.	EJ	01. 12. 15
CHKD.	DK	01. 12. 15
APPD.	JF	01. 12. 15

東元電機股份有限公司
TECO ELEC. & MACH. CO., LTD.
TAIWAN R. O. C.

REV : 00