

1110987654321

POLE		HP	kW	Hz	VOLT	r/min(RPM)	INS	RATING	DIMENSION IN		APPROX WEIGHT	BEARINGS	
2		F	CONT.	mm			DE:6314C3	NDE:6313C3

G

8— ϕ 18.5
HOLES

45°

588

F

E

D

M50XP1.5+2~M20XP1.5

425

30

989

849

140

5

22

110

140


ϕ 550

ϕ 450

0.063

375

GROUNDING
TERMINAL

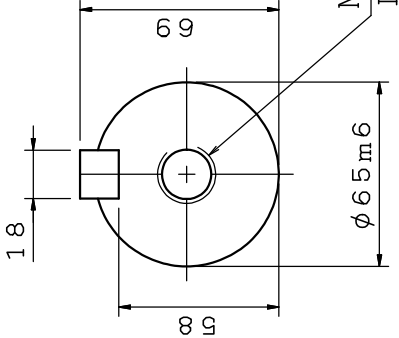

NOTE:

- FOR DIRECT FLEXIBLE COUPLING
- ENCLOSURE: IP56 PROTECTION
- Ex db IIB T4 Gb & Ex db I Mb (IECex/ATEX)
- NON-SPARKING FAN
- WITH THERMISTOR
- WITH SPACE HEATER
- WITH BEARING RTD
- FITTED WITH SPM ADAPTER
- THIS DRAWING IS PRELIMINAL FOR REFERENCE

OUTLINE DIMENSIONS

3—PHASE INDUCTION MOTOR

MOTOR TYPE	AEMVXZ	FRAME NO.	280SA
CUSTOMER	.	DATE	
ORDER NO.	.	TRANS. SHEET	.

第三角法

APPD.	徐聰豪	11.10.21	東元電機股份有限公司 TECO Electric & Machinery Co., Ltd. TAIWAN	DWG NO.	
CHKD.	陳奕元	11.10.21		31057C463260	
DWG.	陳奕元	11.10.21			

11

9

8

7

6

5

4

3

2

1

2