

TECO

# OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :

C160M

POLES

KW

HP

SYNCH RPM

2

11/15

15/20

3000

4

11

15

1500




6

7.5

10

1000

Open Drip-proof Type Squirrel-Cage Rotor.

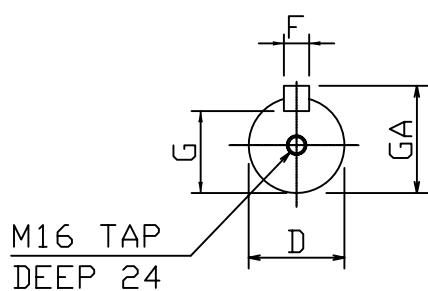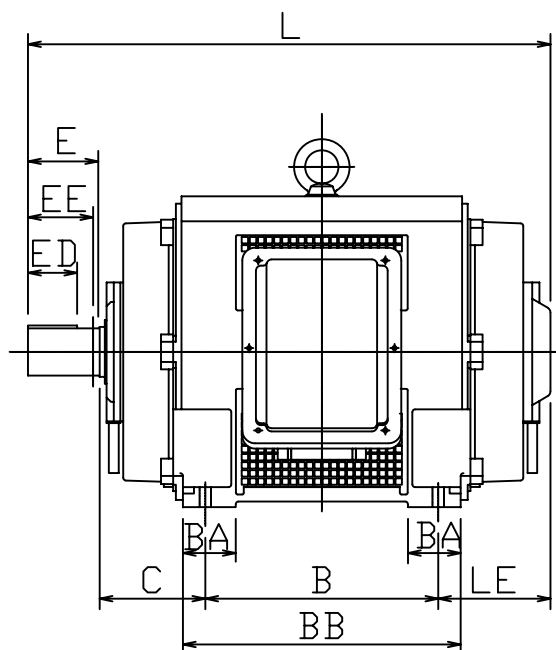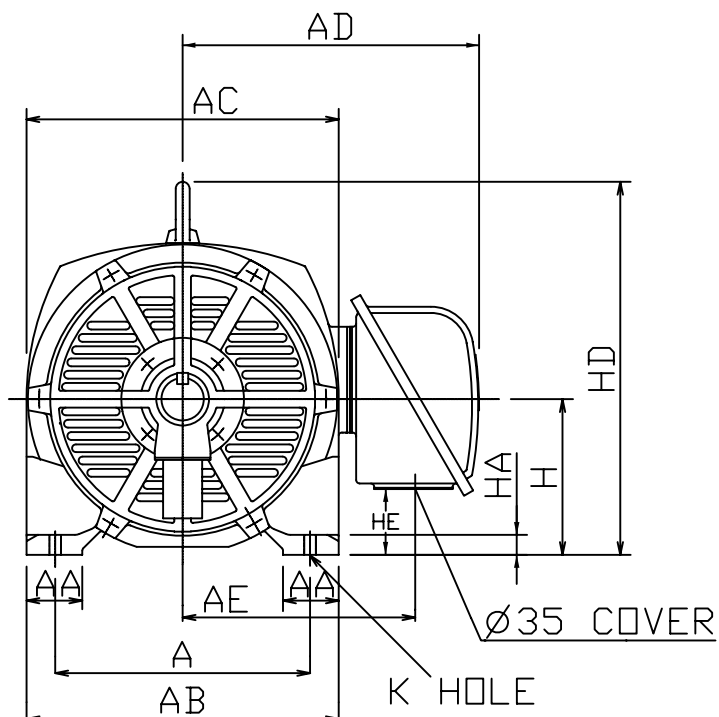

## NOTES:

1. FOOT MOUNTED IM1001.
2. TYPICAL DIMENSIONS ONLY FOR CERTIFIED DIMENSIONS REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

DIMENSIONS IN MM

FRAME NO.		A	AA	AB	AC	AD	AE	B	BA	BB	C	D
C160M		254	50	300	323	264	219	210	—	250	108	48
E	ED	EE	F	G	GA	H	HA	HD	HE	K	L	LE
110	80	—	14	42.5	51.5	160	18	375	96	15	528	100

DWN.	EJ	01. 10. 09	<p>東元電機股份有限公司 TECO ELEC. &amp; MACH. CO., LTD. TAIWAN R. O. C.</p>	DWG NO.	11C2 15C2
CHKD.	DK	01. 10. 09			11C4
APPD.	JF	01. 10. 09		REV : 00	7C6