



OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :

C315SA

POLES

2

KW

220




HP

300

SYNCH RPM

3000

Open Drip-proof Type Squirrel-Cage Rotor.

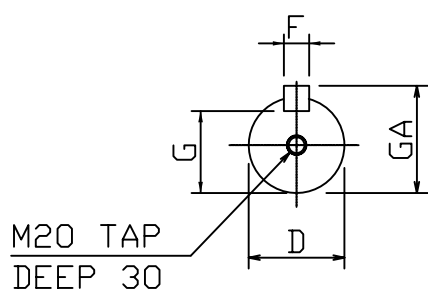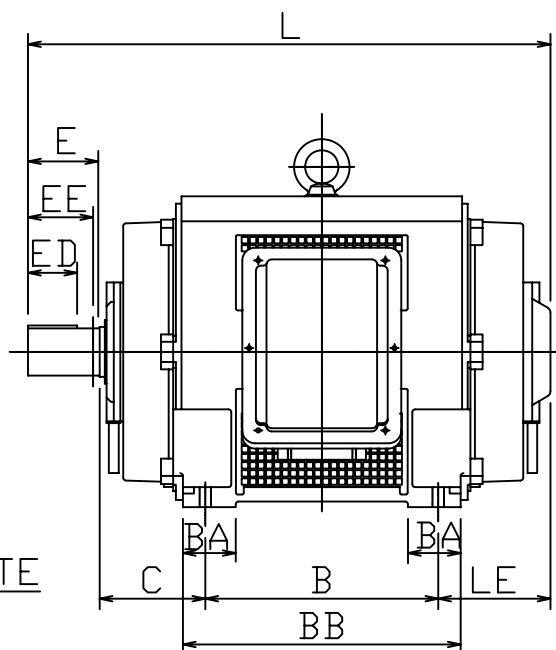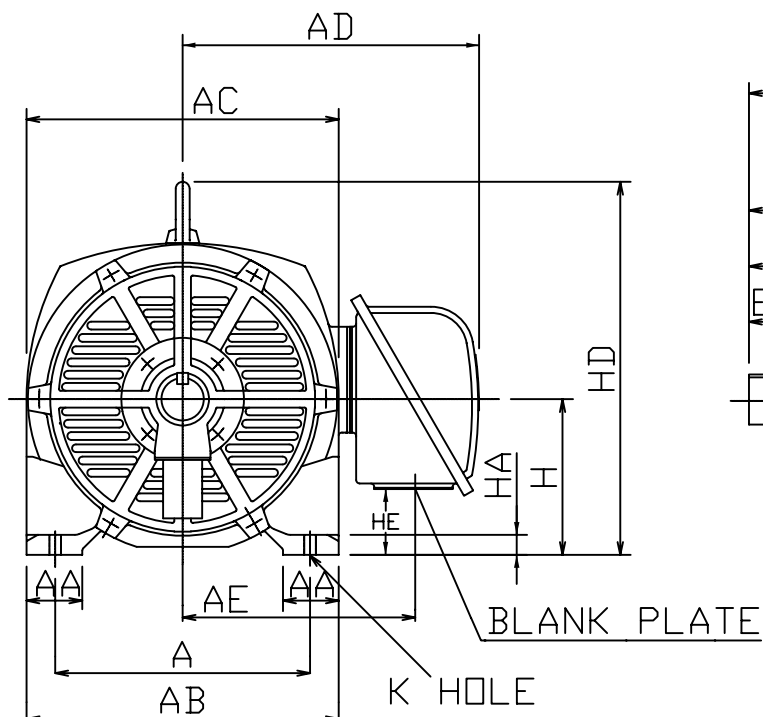

NOTES:

1. FOOT MOUNTED IM1001.
2. TYPICAL DIMENSIONS ONLY FOR CERTIFIED DIMENSIONS REFER TO TECO.
3. FOR DIRECT DRIVE.

DIMENSIONS IN MM

FRAME NO.		A	AA	AB	AC	AD	AE	B	BA	BB	C	D
C315SA		508	110	610	610	545	430	406	—	490	216	70
E	ED	EE	F	G	GA	H	HA	HD	HE	K	L	LE
140	110	—	20	62. 5	74. 5	315	40	733	136	28	989	227

DWN.	EJ	01. 10. 09
CHKD.	DK	01. 10. 09
APPD.	JF	01. 10. 09

東元電機股份有限公司
TECO ELEC. & MACH. CO., LTD.
TAIWAN R. O. C.

DWG NO. 220C2
REV : 00