TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	kW.					
AFJE-MC		300	4	CONT	415	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

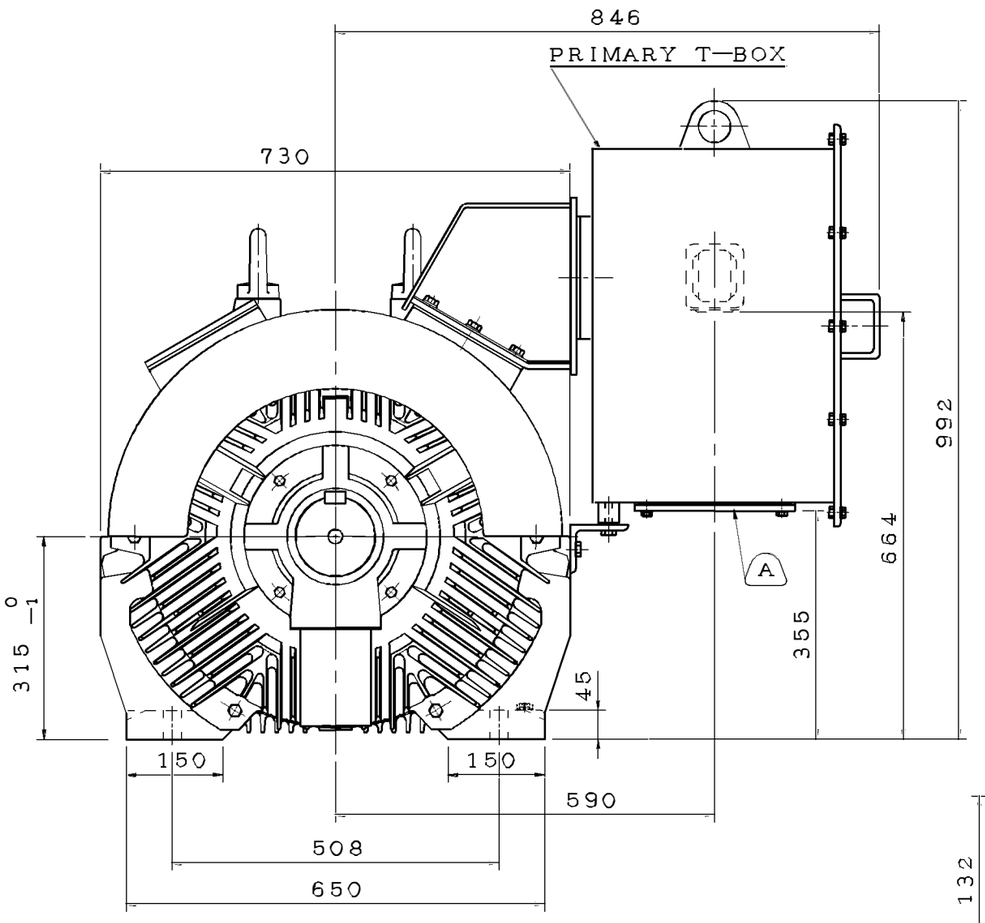

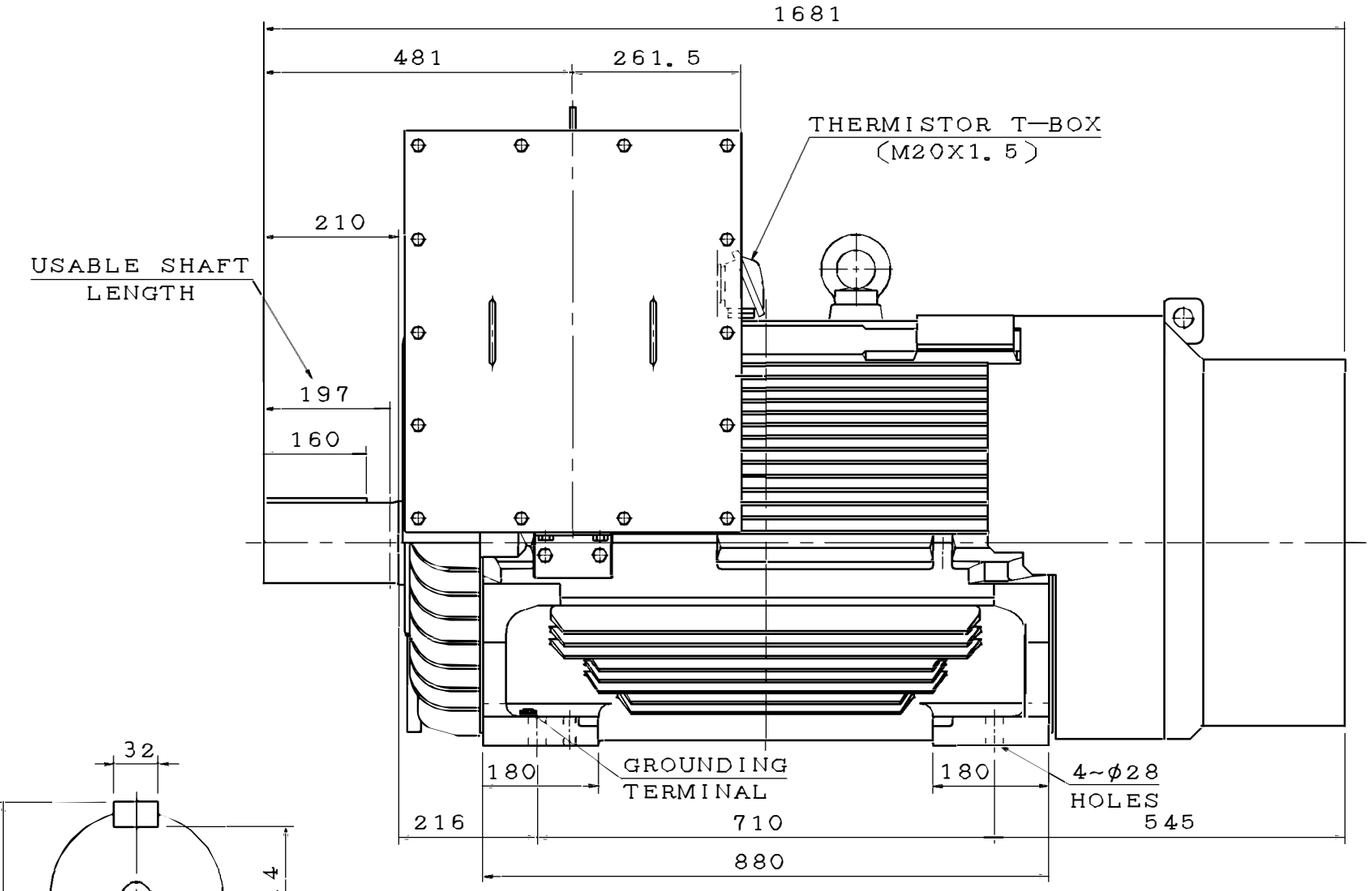

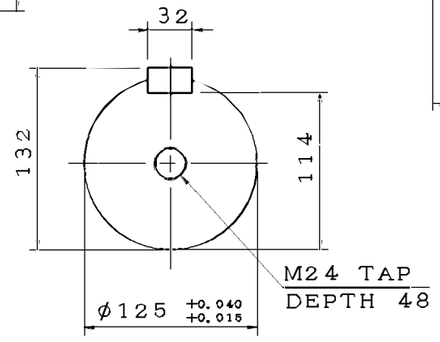

SHAFT END
(ENLARGED VIEW)

NOTE:
1. DIMENSIONS IN mm
2. FRAME NO. 315CC
3. H CLASS INSULATION
4. FOR BELT DRIVE
5. ENCLOSURE: IP66
6. BEARING SIZE: DRIVE-END NU326C3
   OPP. DRIVE-END 6320C3
7. WITH THERMISTOR: PTC 150°C 3PCS(ALARM)
8. WITH THERMISTOR: PTC 180°C 3PCS(TRIP)
9. MOTOR APPROX. WEIGHT: 1850 kg

(A) REMOVABLE COVER FOR MAIN LEAD ENTRY TO BE DRILLED BY CUSTOMER.

DWN.	C. HSU	JAN 25 2017
CHKD.	C. HSU	JAN 25 2017
APPD.	C. LIU	JAN 25 2017

TECO

DATE

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

東元電機股份有限公司
TECO Elec. & Mach. Co., Ltd.

DWG NO. 4B040T757

REV:00

1/1