


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R. P. M
	HP.	KW.					
AFJE-MC		250	4	CONT	380-415	50	1500

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

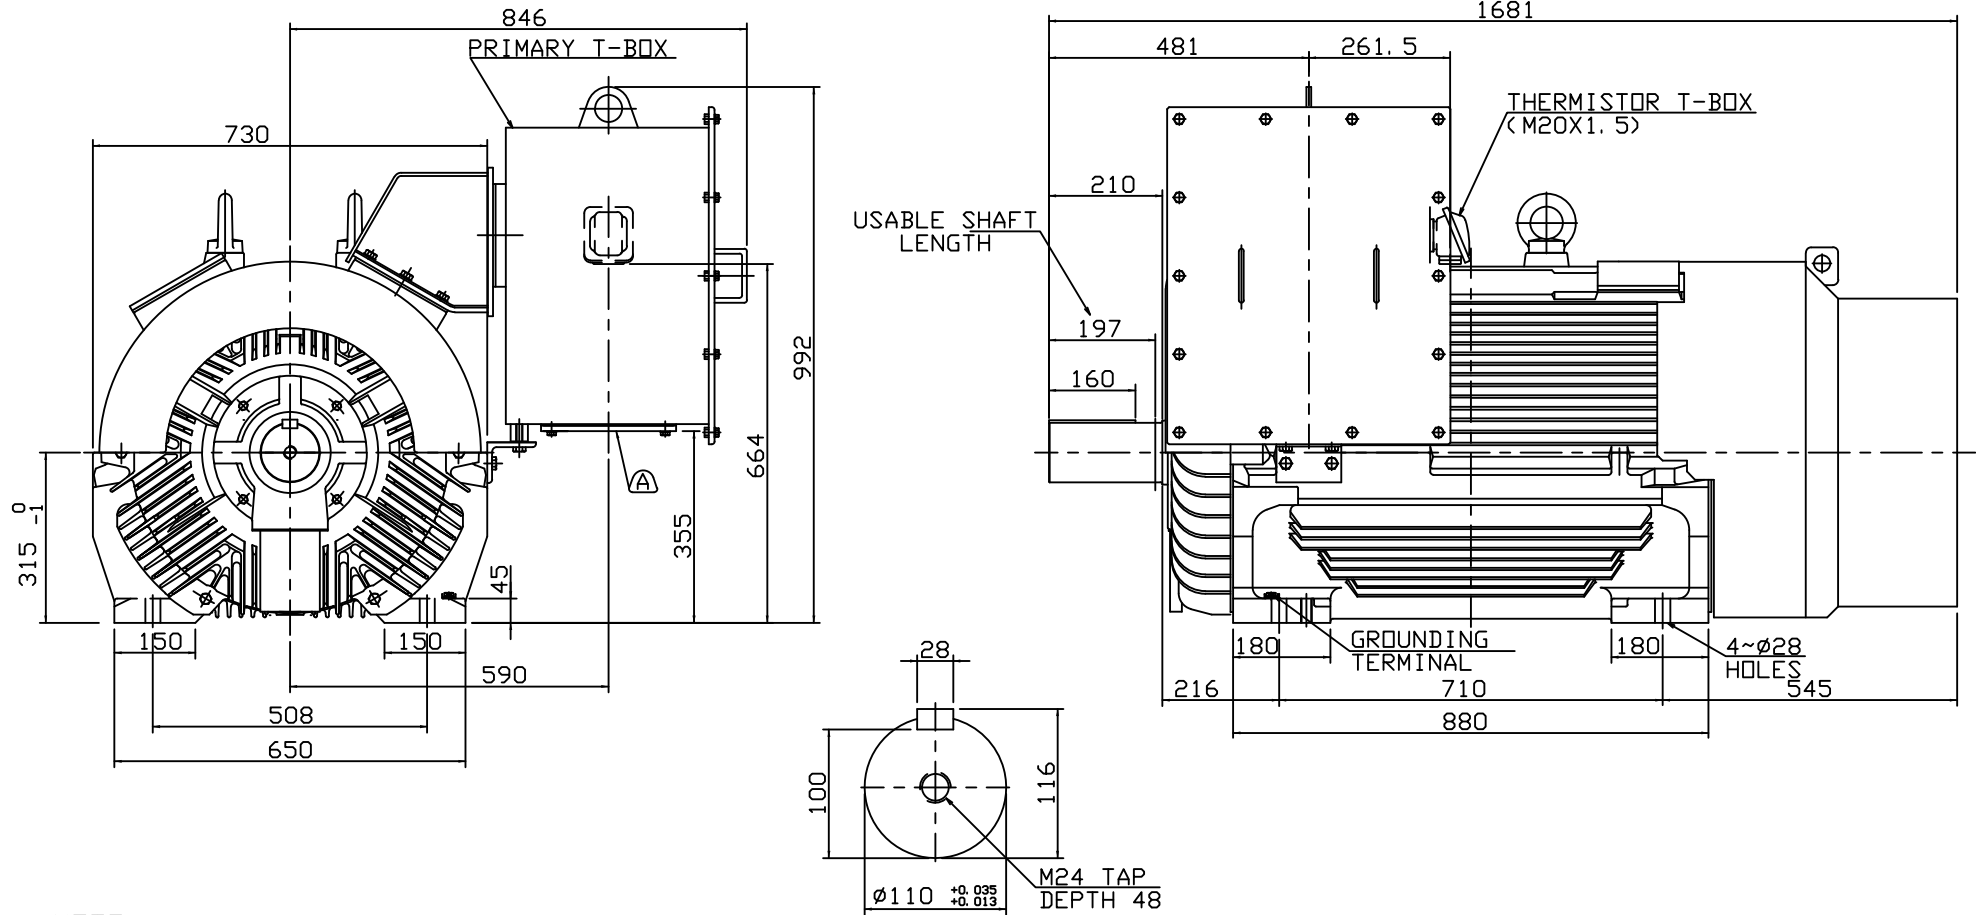

NOTE:

1. DIMENSIONS IN mm
2. FRAME NO. 315CC
3. H CLASS INSULATION
4. FOR BELT DRIVE
5. ENCLOSURE: IP66
6. BEARING SIZE: DRIVE-END NU324C3
OPP. DRIVE-END 6320C3
7. WITH THERMISTOR: PTC 150°C 3PCS(ALARM)
8. WITH THERMISTOR: PTC 180°C 3PCS(TRIP)
9. MOTOR APPROX. WEIGHT: 1725 kg

SHAFT END
(ENLARGED VIEW)

Ⓐ REMOVABLE COVER FOR MAIN LEAD ENTRY TO BE DRILLED BY CUSTOMER.

TECO			OUTLINE DIMENSIONS	
DATE			3-PHASE INDUCTION MOTOR	
DWN.	J. WANG	MAR 30 2017	東元電機股份有限公司 TECO Elec. & Mach. Co., Ltd.	DWG NO.
CHKD.	H. HUANG	MAR 30 2017		4B040T998
APPD.	C. LIU	MAR 30 2017		REV: 00