






# OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR

FRAME NO :

D200LC

| POLES | KW      | HP    | SYNCH RPM |
|-------|---------|-------|-----------|
| 4     | 30      | 40    | 1500      |
| 6     | 18.5/22 | 25/30 | 1000      |
| 8     | 15      | 20    | 750       |
|       |         |       |           |
|       |         |       |           |

Totally Enclosed Fan-Cooled Type, Squirrel-Cage Rotor.

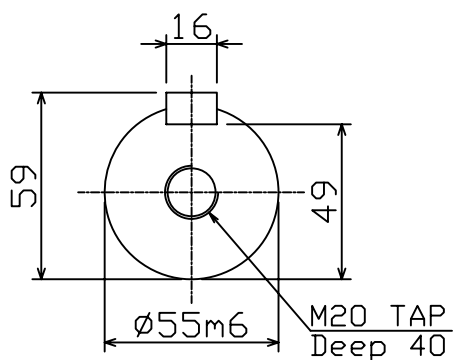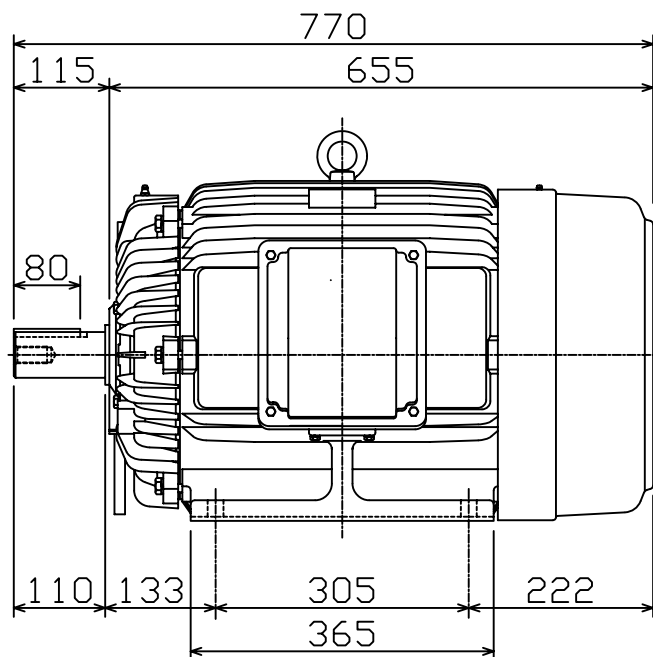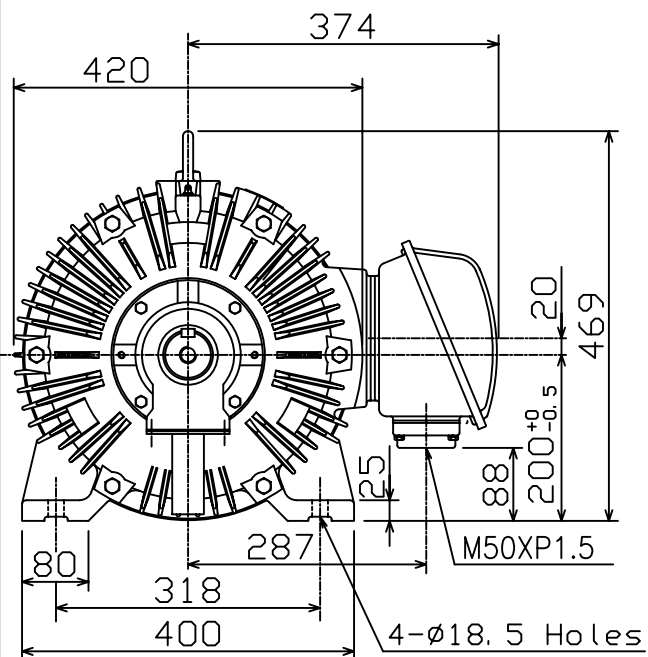

## NOTES:

1. FOOT MOUNTED IM1001.
2. TYPICAL DIMENSIONS ONLY  
FOR CERTIFIED DIMENSIONS  
REFER TO TECO.
3. FOR BELT OR DIRECT DRIVE.

FOR MAXe3MINING AND  
AND MAXe3PREMIUM SEVERE DUTY

|       |    |            |   |
|-------|----|------------|---|
| ◇     |    |            |   |
| DWN.  | EJ | 01. 12. 15 | 東元電機股份有限公司<br>TECO ELEC. & MACH. CO., LTD.<br>TAIWAN R. O. C. |
| CHKD. | DK | 01. 12. 15 |   |
| APPD. | JF | 01. 12. 15 |   |
|       |    |            | REV : 00  |